

Glides, Casters and Brackets

Standard Glide

The "foot pad" provided with standard Movotec® systems is the Standard Glide. The Standard Glide includes a nylon base with a non-skid TPE pad and steel M10 threaded bolt with lock nut for adjustability.

Mounting Glide

The Mounting Glide is used in applications when fastening the lift actuator to a floor or work surface is necessary. Mounting Glides are also used in applications where the Movotec® lift cylinder is mounted inverted with the glide upward. The Mounting Glide base is aluminum with a steel thread and lock nut for adjustability.

Disc Glide

The Disc Glide is similar to the Standard Glide but does not have the non-skid feature. The Disc Glide has a nylon base, steel thread and lock nut for adjustability.

Casters

Casters are available in locking or non-locking models. Both casters include M10 threaded steel bolts sized for easy assembly to Movotec® CB, CN and CL cylinders. Caster wheel is Polyurethane on Polypropylene hub.



Standard Glide
D44-01031



Mounting Glide
D44-00003



Disc Glide
644-01037



Caster
D44-00038



Locking Caster
D44-00037

Note:

The standard glide and mounting glide are also available in a corrosion-resistant version for applications in environments subject to periodic wash-down.

Brackets

Mounting Brackets may be used when the threaded holes in Movotec® CB and CN cylinders are not conveniently located for the application. Order one bracket set per lift cylinder in the application.



Small Mounting Bracket Set



D44-00002A



Large Mounting Bracket Set



D44-00001



L Mounting Bracket Set



D44-00018



Creform™ Bracket Adaptor Set



D44-00027

(For easy mounting of Creform™ brackets, shown in black but not included.)

Motor Drive Switch Options and Accessories



Low-Profile Switch 645-02553

- Standard, industrial-grade activation switch
- Commonly used with bolt-on and corner leg systems
- Ergonomically designed with durable, plastic body
- Switch provided with mounting screws
- 22mm high x 55mm wide x 59mm deep
- 1.8m cable length



Office Switch 645-03103

- Office-oriented motor activation switch
- Ergonomically compact design with large, easy to use buttons
- 18mm high x 67mm wide x 46mm deep
- 1.8m cable length



Foot Switch D45-02375

- Designed for hands-free motor operation
- Foot pedal made from durable zinc diecast with a medium grey finish and non-skid pad
- Available with or without custom decal
- 37mm high x 108mm wide x 122mm long
- 3m cable length



IR Remote Control Switch 645-03105

- Provides wireless control of lift system
- Features 4 memory presets
- IR receiver mounts using adhesive pad
- 2m cable length




Display Switch 645-03102

- Designed for applications requiring user memory presets and work-surface height display
- Features four memory presets
- Features digital display
- Switch slides under work surface when not in use
- Switch provided with mounting plate and screws
- 26mm high x 136mm wide x 82mm deep
- 2m cable length



Remote Hand Switch D45-02368

- Provides remote access to switch
- Includes magnetic strip for mounting to steel surfaces
- 101mm high x 51mm wide x 32mm deep
- 3m cable length

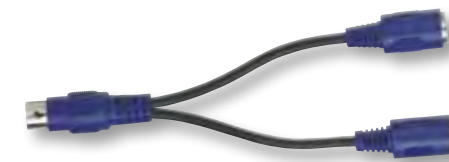

Dual Switch Splitter Cable 645-03311

- Allows use of two switch options on a single lift system
- 200mm cable length

Note:

Motor and switch extension cables available upon request.



Switch Interface Cable D99-00078

- Includes instructions with pinout for easy integration with other switches or PLC devices
- 3m cable length